



**FOR EXCLUSIVE NEWS AND DEALS
JOIN THE BLUE CREW**

boschbluecrew.com.au



**REGISTER FOR YOUR 6 YEAR TOOL &
BATTERY WARRANTY**

www.bosch-professional.com/guarantee



6 YEARS

**Tool & Battery
Guarantee***

*With online registration

Robert Bosch (Australia) Pty. Ltd.
1555 Centre Road
Clayton, VIC 3168
PH: +61 3 9541 5555
bosch-pt.com.au/au/en/

Robert Bosch (New Zealand) Pty. Ltd.
PO Box 13324
Onehunga, Auckland 1643
PH: 0800 543 353
bosch-pt.co.nz/nz/en/



@BOSCHTOOLSANZ

No liability is accepted for printing errors.
Subject to technical alterations.

MEASURING TOOLS PRODUCT CATALOGUE 2023

Bosch Professional.

TABLE OF CONTENT

	About MeasureOn	4	7	Line Laser	24
	About Bosch Levelling Remote App	6		GLL 30 G	25
	About Bosch Thermal App	7		GLL 3-15 X	25
	About GTC Transfer Software	8		GLL 5-50 X	26
	About Ingress Protection Ratings	9		GLL 3-80	26
				GLL 3-80 CG	27
1	Laser Measure	10	8	Rotation Laser	28
	GLM 40	11		GRL 300 HVG	29
	GLM 400	11		GRL 350 HV	29
	GLM 50-23 G	12		GRL 600 CHV	30
	GLM 50-27 CG	12			
	GLM 100-25 C	13	9	Optical Level	31
	GLM 150 C	13		GOL 26 D	32
				GOL 32 D	32
2	Measuring Wheel	14	10	Thermo Detector	33
	GWM 32	15		GIS 1000 C	34
	GWM 40	15		GTC 400 C	34
				GTC 600 C	35
3	Inclinometer	16	11	Inspection Camera	36
	GIM 60	17		GIC 120	37
	GIM 60 L	17		GIC 120 C	37
	GIM 120	17			
4	Angle Measurer	18	12	Wallscanner	38
	GAM 220	19		GMS 120	39
	GAM 220 MF	19		D-tect 120	39
	GAM 270 MFL	19		D-tect 200 C	40
5	Point Laser	20		Accessories Page	41
	GPL 3 G	21			
	GPL 5 G	21			
6	Combi Laser	22			
	GCL 2-15 G	23			
	GCL 2-50 CG	23			

* The product images shown are for illustration purposes only and may not be an exact representation.
This document provides general information only and may be subject to change at any time without notice.
For details, please refer to the Operating Instruction.
^ plus use-dependent deviation



UPGRADE YOUR EFFICIENCY.

MeasureOn is your app for easy documentation of floor plans, measurements, photos, and notes. Benefit from a high degree of flexibility and process your data anywhere – on the construction site, at the office, on the move, or at home.

USE THE NEW INFINITE WORKSPACE

Start your project and save all information in one place – the digital workspace. Arrange the collected data according to your personal needs and expand the work-space at any time.

ADD PHOTOS


Take photos with your smart device, then simply insert them into the infinite workspace, and use your laser range finder to add measured values to your photos.

SKETCH FLOOR PLANS

Use your finger to quickly and intuitively sketch floor plans organised by individual rooms. With your laser range finder you can capture measurements instantly and insert them error-free into the app.

ADD NOTES

Say goodbye to scraps of paper: add all your notes to the flexible workspace and access them anywhere at any time.

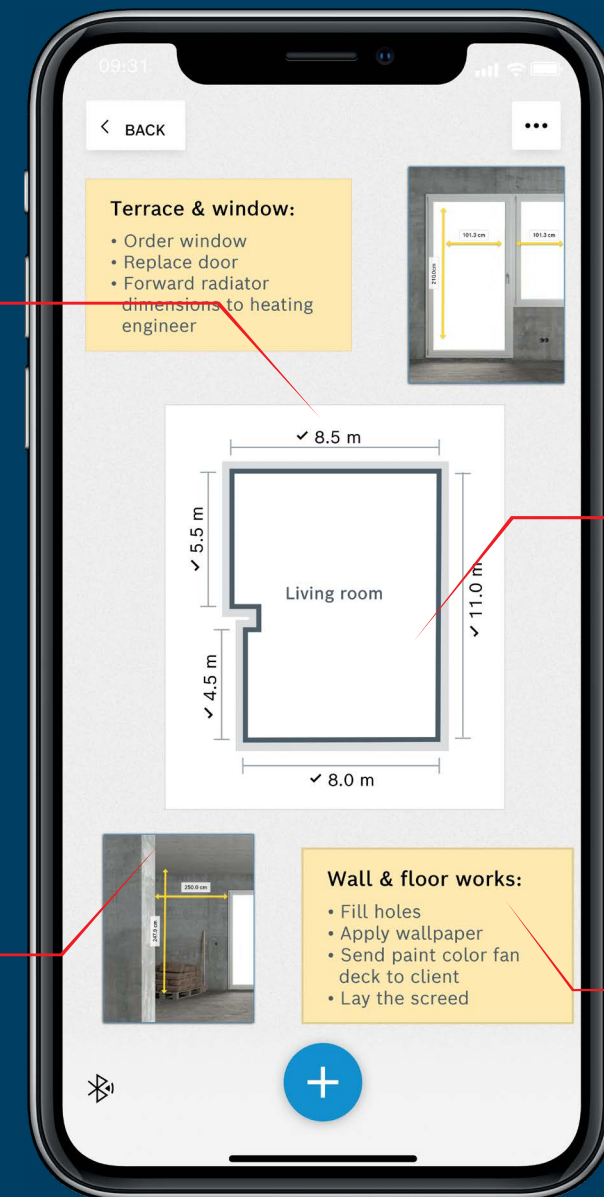

iOS



Android

ALL INFORMATION IN ONE HAND.

MeasureOn. Upgrade your efficiency.

With one app plus laser range finder, you have every project in your hand and under control. Sketch floor plans with your finger, add photos and notes, insert measurements, and benefit from many more features – all in one app.

BOSCH LEVELLING REMOTE APP – CONTROLLING OF COMBI AND LINE LASERS VIA SMARTPHONE

With the Bosch Professional combi and line lasers, all kinds of levelling tasks can be completed with just one tool. As they are particularly easy to use, you can adjust the laser quickly and easily.

Experience even greater precision when you connect your tools to the Bosch Levelling Remote app via a Bluetooth® connection. This hands-free operation allows you to turn lines on and off, activate receiver mode or put your tool on standby without the slightest wobble of the laser. With the help of the RM 3 Professional motorised multifunctional mount, the laser lines can be adjusted accurate to the nearest millimetre. You can also adjust the visibility of the laser via the app according to the ambient light or remaining battery life.



iOS



Android



BOSCH THERMAL APP – MEASURE TEMPERATURES AND SEND THEM TO YOUR SMARTPHONE

With Bosch Professional infra-red camera for a rapid overview and thermo detector for detail, you can measure and record surface temperatures easily and quickly. Bosch thermo tools provide absolute reliability in areas such as heating, air conditioning and climate technology, plumbing, electrics or in industry.

Measurement and documentation has become simpler thanks to a Wi-Fi module that creates a Wi-Fi hotspot around it. This means you can import your results directly to the Bosch Thermal App and keep working with them there.



iOS



Android



GTC TRANSFER SOFTWARE – EASY TRANSFER AND PROCESSING OF YOUR THERMAL DATA

With the GTC Transfer Software, you can transfer data from your Bosch Professional thermal imaging camera to a PC via a USB interface. What's more? You can analyze thermal images with special functions to get the best visualization for your images and create projects with multiple thermal images and professional reports.

GTC Transfer Software is a Windows PC Software (Windows 7, Windows 8, Windows 10) for thermal images transferred from GTC 400 C and GTC 600 C. All in all, it enables extra flexibility, productivity, convenience and great deal of quality that was expected from Bosch Professional. Ready to get started? Download now!



MORE ABOUT INGRESS PROTECTION RATINGS



X	X means there is no data available to specify a protection rating with regard to this criterion.	X	X means there is no data available to specify a protection rating with regard to this criterion.
0	No protection against contact and ingress of objects	0	No protection against ingress of water.
1	Effective against Any large surface of the body, such as the back of a hand, but no protection against deliberate contact with a body part.	1	Protection against dripping water. Tested for 10 minutes.
2	Effective against fingers or similar objects.	2	Protection against dripping water when tilted at 15°. Tested for 10 minutes. Water equivalent to 3 mm rainfall per minute.
3	Effective against tools, thick wires, etc.	3	Protection from water falling as a spray at any angle up to 60° from the vertical shall have no harmful effect.
4	Effective against most wires, slender screws, large ants etc.	4	Protection from water splashing against the enclosure from any direction shall have no harmful effect.
5	Effective against ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment. Dust protected.	5	Protection from water projected by a nozzle 6.3 mm against enclosure from any direction shall have no harmful effects.
6	Effective against no ingress of dust; complete protection against contact (dust-tight). A vacuum must be applied. Test duration of up to 8 hours based on airflow. Dust-tight.	6	Protection from water projected in powerful jets 12.5 mm against the enclosure from any direction shall have no harmful effects.

6 YEARS

Tool & Battery Guarantee*

*With online registration

LASER MEASURE

GLM 40 PROFESSIONAL

Simple and Easy with One Push



Technical Specifications	
Part number	0 601 072 980
Laser class	2
Measuring range	0.15 – 40.00 m
Measuring accuracy	± 2.0 mm^
Unit of measurement	m; ft
Power supply	2 x 1.5 V LR03 (AAA)
Weight	0.1 kg
Scope of delivery	2 x AAA battery

- Accessories
- Pouch

GLM 400 PROFESSIONAL

Conversion at One Press



Technical Specifications	
Part number	0 601 072 RK0
Laser class	2
Measuring range	0.05 – 40.00 m
Measuring accuracy	± 1.5 mm^
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR03 (AAA)
Weight	0.1 kg
Scope of delivery	Hand strap, 2 x AAA battery

GLM 50-23 G PROFESSIONAL

2-in-1 Laser Measure with Green Laser for Rough Jobsites



Technical Specifications	
Part number	0 601 072 VK0
Laser class	2
Measuring range	0.05 – 50.00 m
Measuring accuracy	± 1.5 mm^
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	2 x AA battery

Accessories

- Pouch
- 3.7 V Battery
- Belt Clip
- BT 150

GLM 100-25 C PROFESSIONAL

Precise Laser Measure for Outdoor Measuring and Documenting




Technical Specifications	
Part number	0 601 072 YK0
Laser class	2
Measuring range	0.08 – 100.00 m
Measuring accuracy	± 1.5 mm^
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, 3 x AA battery

Accessories

- Pouch
- BT 150

GLM 50-27 CG PROFESSIONAL

Robust and Reliable Laser Measure with Green Laser for Excellent Visibility

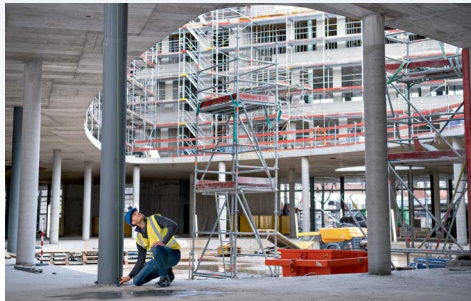

Technical Specifications	
Part number	0 601 072 UK0
Laser class	2
Measuring range	0.05 – 50.00 m
Measuring accuracy	± 1.5 mm^
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, 2 x AA battery

Accessories

- Pouch
- 3.7 V Battery
- Belt Clip
- BT 150

GLM 150 C PROFESSIONAL

Long Range Laser Measure Applicable for All Surroundings with Documentation



Technical Specifications	
Part number	0 601 072 FK0
Laser class	2
Measuring range	0.08 – 150.00 m
Measuring accuracy	± 1.5 mm^
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, hand strap, 3 x AA battery

Accessories

- Pouch
- BT 150

6 YEARS

**Tool & Battery
Guarantee***

*With online registration

MEASURING WHEEL

GWM 32 PROFESSIONAL

Lightweight and Handy Measuring Wheel



Technical Specifications

Part number	0 601 074 000
Wheel diameter	318.5 mm
Max. measured value	9999.9 m
Measuring accuracy	± 1 dm / 100 m
Weight	1.4 kg
Scope of supply	Protective bag

GWM 40 PROFESSIONAL

Robust Measuring Wheel for Jobsite Use



Technical Specifications

Part number	0 601 074 100
Wheel diameter	389.1 mm
Max. measured value	9999.9 m
Measuring accuracy	± 5 cm / 100 m
Weight	3.3 kg
Scope of supply	Protective bag

6 YEARS


Tool & Battery
Guarantee*

*With online registration

INCLINOMETER

GIM 60 PROFESSIONAL



Precise Digital Inclinator

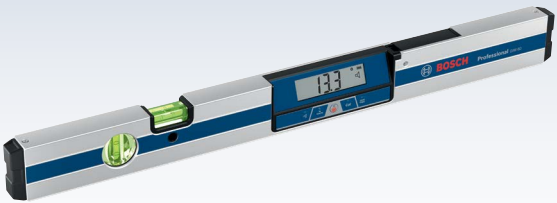

Technical Specifications	
Part number	0 601 076 700
Length	60 cm
Measuring range	0 – 360° (4 x 90°)
Measuring accuracy	± 0.05° (0°/90°); ± 0.2° (1°-89°)
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.8 kg
Scope of delivery	Protective bag, 4 x AA battery

GIM 60 L PROFESSIONAL


Laser-accurate Incline Transfer Over Longer Distances

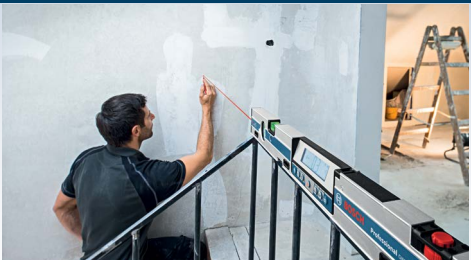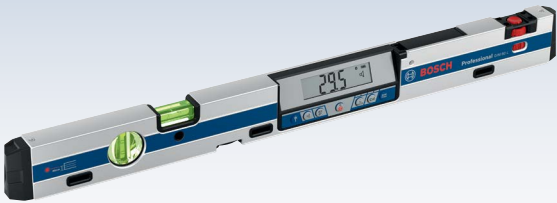

Technical Specifications	
Part number	0 601 076 900
Laser class	2
Length	60 cm
Measuring range	0 – 360° (4 x 90°)
Measuring accuracy	± 0.05° (0°/90°); ± 0.2° (1°-89°)
Laser range	30 m
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.9 kg
Scope of delivery	Protective bag, 4 x AA battery

GIM 120 PROFESSIONAL

Longer for Better Precision

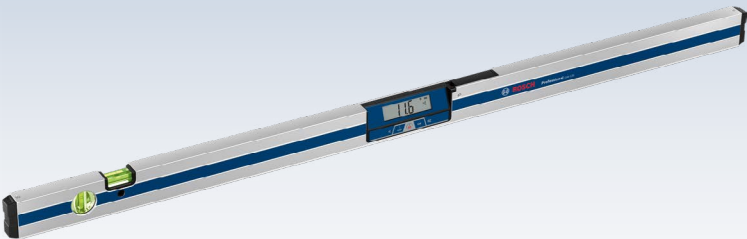

Technical Specifications	
Part number	00 601 076 800
Length	120 cm
Measuring range	0 – 360° (4 x 90°)
Measuring accuracy	± 0.05° (0°/90°); ± 0.2° (1°-89°)
Power supply	4 x 1.5 V LR6 (AA)
Weight	1.4 kg
Scope of delivery	Protective bag, 4 x AA battery

6 YEARS
Tool & Battery
Guarantee*

*With online registration

ANGLE MEASURER

GAM 220 MF PROFESSIONAL

Fast Calculation of Mitre Angles




Technical Specifications	
Part number	0 601 076 600
Arm length	40 cm
Measuring range	0 – 220°
Measuring accuracy	± 0.1°
Power supply	4 x 1.5 V LR6 (AA)
Weight	1.2 kg
Scope of delivery	Protective bag, leg extension, 4 x AA battery



GAM 270 MFL PROFESSIONAL

Angle Meter and Inclinator with Laser-accurate Transfer

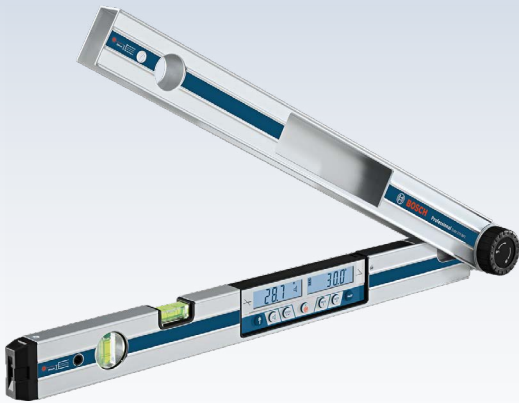

Technical Specifications	
Part number	0 601 076 400
Laser class	2
Arm length	60 cm
Measuring range	0 – 270°
Measuring accuracy	± 0.1°
Laser range	30 m
Power supply	4 x 1.5 V LR6 (AA)
Weight	1.7 kg
Scope of delivery	Protective bag, leg extension, 4 x AA battery



6 YEARS

Tool & Battery Guarantee*

*With online registration

POINT LASER

GPL 3 G PROFESSIONAL

Robust and Compact 3-point Laser with Highly Visible Green Laser Points



Technical Specifications	
Part number	0 601 066 N00
Laser class	2
Projection	3 points
Working range	up to 30 m
Accuracy	± 0.35 mm/m^ [^] ; ± 0.7 mm/m^ [^] (bottom point)
Self-levelling range	± 4°
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.4 kg
Scope of delivery	Pouch, 2 x AA battery

Accessories

- BT 150

GPL 5 G PROFESSIONAL

Robust and Compact 5-point Laser with Highly Visible Green Laser Points



Technical Specifications	
Part number	0 601 066 P00
Laser class	2
Projection	5 points
Working range	up to 30 m
Accuracy	± 0.35 mm/m^ [^] ; ± 0.7 mm/m^ [^] (bottom point)
Self-levelling range	± 4°
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.4 kg
Scope of delivery	Pouch, 2 x AA battery

Accessories

- BT 150

6 YEARS

Tool & Battery Guarantee*

*With online registration

COMBI LASER

GCL 2-15 G PROFESSIONAL

Combi Green Laser Level with Better Visibility



Technical Specifications	
Part number	0 601 066 J00
Laser class	2
Projection	2 lines; 2 points
Working range	up to 15 m (line); 10 m (point)
Accuracy	± 0.3 mm/m^ (line); ± 0.7 mm/m^ (point)
Self-levelling range	± 4°
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	Carrying case, pouch, RM 1, ceiling clamp, target plate, 3 x AA battery



- Accessories
- RM 1
 - BT 150
 - BT 150-5/8"
 - Laser Glasses Green

GCL 2-50 CG PROFESSIONAL

Optimum Visibility Connected with Smart Functions



Technical Specifications	
Part number	0 601 066 H80
Laser class	2
Projection	2 lines; 2 points
Working range	up to 50 m (line); 10 m (point)
Accuracy	± 0.3 mm/m^ (line); ± 0.7 mm/m^ (point)
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-ion / 10.8 V Li-ion
Weight	0.6 kg
Scope of delivery	Carrying case, pouch, RM 2, target plate, AA1, 4 x AA battery



- Accessories
- | | |
|------------------|-----------------------|
| • LR 7 | • BT 150/BT 150-5/8" |
| • Mounting Clamp | • BT 350 |
| • BM 1 | • Laser Glasses Green |
| • RM 2 | • Target Plate |
| • RM 3 | • 12 V Li-ion |
| • RC 2 | • 10.8 V Li-ion |

6 YEARS
Tool & Battery
Guarantee*

*With online registration

LINE LASER

GLL 30 G PROFESSIONAL

Simple and Compact Green Laser Level for Bright Environment



Technical Specifications

Part number	0 601 063 V80
Laser class	2
Projection	2 lines
Working range	up to 10 m
Accuracy	± 0.8 mm/m^
Self-levelling range	± 4°
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.3 kg
Scope of delivery	Pouch, 2 x AA battery



Accessories

- BT 150


GLL 3-15 X PROFESSIONAL

3-line Laser with Improved Line Visibility for Increased Work Efficiency



Technical Specifications

Part number	0 601 063 M80
Laser class	2
Projection	3 lines; 1 point
Working range	up to 15 m (line); 5 m (point)
Accuracy	± 0.7 mm/m^ (point); ± 0.2 mm/m^ (horizontal); ± 0.3 mm/m^ (vertical)
Self-levelling range	± 3°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	Carrying bag, 4 x AA battery

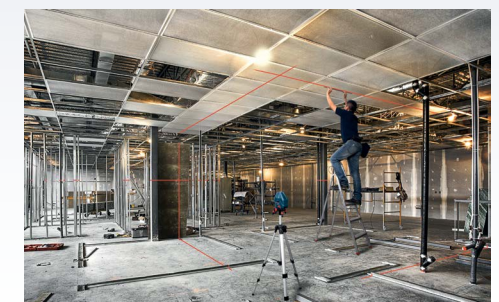

Accessories

- BT 150-5/8"
- Laser Glasses Red

GLL 5-50 X PROFESSIONAL

5-line Laser with Improved Line Visibility for Increased Work Efficiency



Technical Specifications	
Part number	0 601 063 N80
Laser class	2
Projection	5 lines; 1 point
Working range	up to 50 m (line); 5 m (point)
Accuracy	± 0.2 mm/m^ (horizontal); ± 0.7 mm/m^ (point); ± 0.3 mm/m^ (vertical)
Self-levelling range	± 3°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	Carrying bag, 4 x AA battery




Accessories

- LR 6
- LR 7
- Mounting Clamp
- BT 150-5/8"
- Laser Glasses Red
- Target Plate

GLL 3-80 CG PROFESSIONAL

Green Line Laser with Superior Visibility in 3 x 360° - Simply Connected

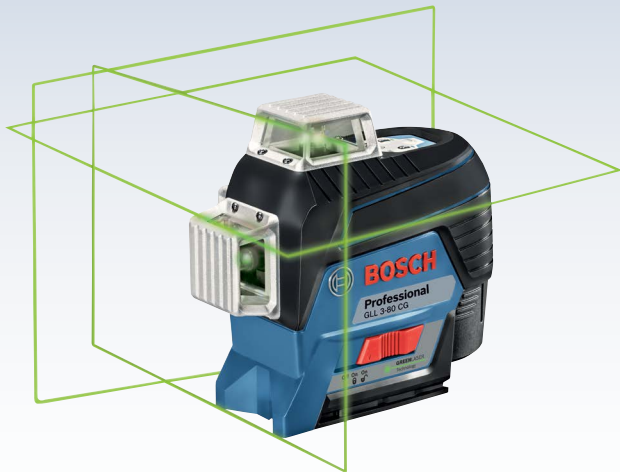

Technical Specifications	
Part number	0 601 063 U80
Laser class	2
Projection	3 x 360° lines
Working range	up to 120 m (radius)
Accuracy	± 0.2 mm/m^
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-ion / 10.8 V Li-ion
Weight	0.9 kg
Scope of delivery	Carrying case, BM 1, ceiling plate, pouch, target plate, AA1, 4 x AA battery



Accessories

- LR 7
- Mounting Clamp
- BM 1
- BT 150
- BT 150-5/8"
- BT 350
- Laser Glasses Green
- Target Plate
- 12 V Li-ion
- 10.8 V Li-ion

GLL 3-80 PROFESSIONAL

3 x 360° for Visibility on a New Level



Technical Specifications	
Part number	0 601 063 S00
Laser class	2
Projection	3 x 360° lines
Working range	up to 120 m (radius)
Accuracy	± 0.3 mm/m^
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.8 kg
Scope of delivery	Carrying case, pouch, target plate, 4 x AA battery



Accessories

- LR 6
- LR 7
- Mounting Clamp
- BM 1
- BT 150
- BT 150-5/8"
- BT 350
- Laser Glasses Red
- Target Plate

6 YEARS

Tool & Battery Guarantee*

Simply register your power tool, measuring tool, battery or charger online within 4 weeks of purchase and extend your warranty to 6 years!

*With online registration

www.bosch-professional.com/guarantee



REGISTRATION

Create a user account once and register your devices there by stating the product number, serial number and purchase date



CERTIFICATE

After your registration you'll receive and certificate to confirm that your tool's warranty is now valid



6 YEARS

Tool & Battery Guarantee*

*With online registration



ROTATION LASER

GRL 300 HVG PROFESSIONAL

Outstanding Visibility for Indoor Applications



- 150/300/600 rpm
- 50°/25°/10°/0°
- SHOCK WARNING
- GREEN LASER TECHNOLOGY
- IP 54




Technical Specifications	
Part number	0 601 061 703
Laser class	3R
Working range	up to 300 m (diameter)
Accuracy	± 0.1 mm/m^
Self-levelling range	± 5°
Power supply	2 x 1.5 V LR20 (D)
Weight	1.8 kg
Scope of delivery	Carrying case, LR 1G, RC 1, WM 4, bracket, target plate, laser viewing glasses, 2 x D battery, 1 x 9V battery, 1 x AA battery

Accessories


- LR 1 G
- Mounting Clamp
- BT 160
- BT 170 HD
- Laser Glasses Green
- Target Plate
- GR 240
- GR 500

GRL 350 HV PROFESSIONAL

Rotational Laser for Horizontal and Vertical Application with Manual Dual Slope

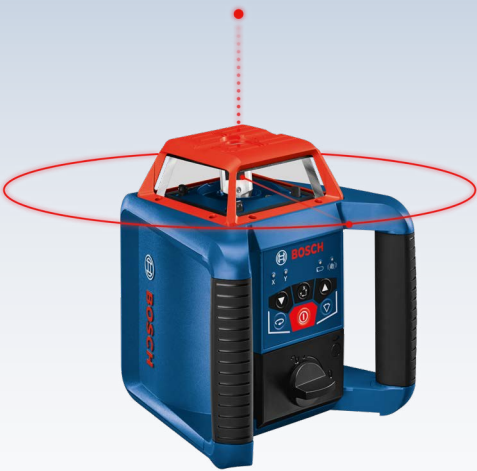

- 0/150/300/600rpm
- 50°/25°/10°
- SHOCK WARNING
- DUAL SLOPE
- IP 56

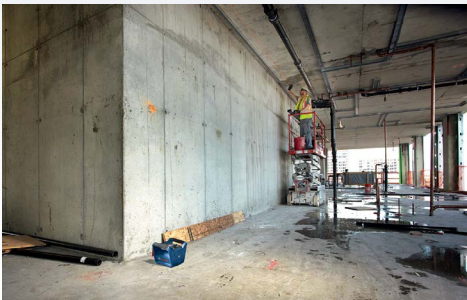

Technical Specifications	
Part number	0 601 061 S40
Laser class	3R
Working range	up to 350 m (diameter)
Accuracy	± 0.05 mm/m^ (horizontal); ± 0.1 mm/m^ (vertical)
Self-levelling range	± 5°
Power supply	2 x 1.5 V LR20 (D)
Weight	1.8 kg
Scope of delivery	Carrying case, LR 30, RB 30, WM 24, target plate, laser viewing glasses, 2 x D battery, 1 x 9V battery

Accessories

- WM 4
- WM 24
- RC 4
- BT 160
- BT 170 HD
- Laser Glasses Red
- Target Plate
- GR 240
- GR 500


GRL 600 CHV PROFESSIONAL

Achieve Accurate Results and Save Time – Perfect for Heavy-duty Jobs

6 YEARS

Tool & Battery Guarantee*


*With online registration

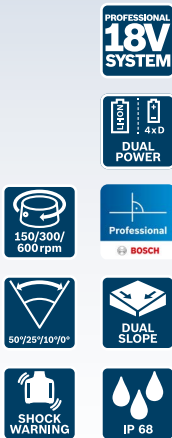

Technical Specifications	
Part number	0 601 061 F40
Laser class	2
Working range	up to 600 m (diameter)
Accuracy	± 0.05 mm/m^
Self-levelling range	± 5°
Power supply	4 x 1.5 V LR20 (D) / 18 V Li-ion
Weight	4.6 kg
Scope of delivery	Carrying case, LR 60, RC 6, RB 60, WM 6, BA 1, target plate, laser viewing glasses, 4 x D battery, 4 x AA battery

Accessories

- WM 4
- BT 160
- BT 170 HD
- Laser Glasses Red
- Target Plate
- GR 240
- GR 500

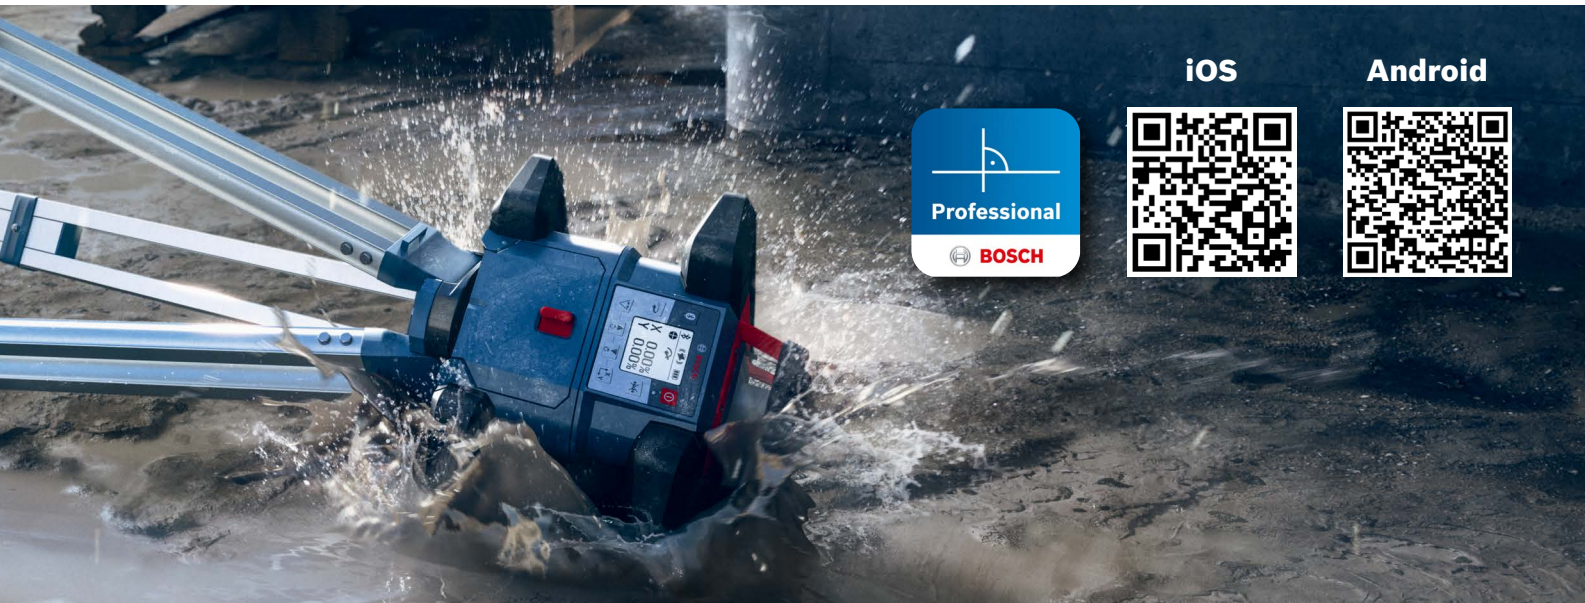

PROFESSIONAL
18V
SYSTEM

GET READY FOR THE NEW GRL 600 CHV.

Tough all around. Inside and out.
Endures even the harshest environment.

OPTICAL LEVEL

GOL 26 D PROFESSIONAL

Robust and Reliable – Ideal for Long Distances



Technical Specifications	
Part number	0 601 068 000
Magnification	26 x
Working range	100 m
Accuracy	± 1.6 mm at 30 m
Weight	1.5 kg
Scope of delivery	Carrying case, adjusting pin, hex key, lens cover, plumb bob



Accessories

- BT 160
- BT 170 HD
- GR 240
- GR 500

GOL 32 D PROFESSIONAL

Robust Solution for Precise Levelling at Long Distances



Technical Specifications	
Part number	0 601 068 500
Magnification	32 x
Working range	120 m
Accuracy	± 1.0 mm at 30 m
Weight	1.5 kg
Scope of delivery	Carrying case, adjusting pin, hex key, lens cover, plumb bob



Accessories

- BT 160
- BT 170 HD
- GR 240
- GR 500

6 YEARS

Tool & Battery Guarantee*

*With online registration



THERMO DETECTOR

GIS 1000 C PROFESSIONAL

All-round Thermo Detector for Precise and Versatile Measurements



Technical Specifications	
Part number	0 601 083 3K1
Laser class	2
Measuring range	-40 °C – +1000 °C
Measuring accuracy	± 1.0 °C^ (0 to 100 °C)
Measuring accuracy (relative humidity)	± 2 %
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-ion / 10.8 V Li-ion
Weight	0.6 kg
Scope of delivery	Carrying bag, AA 1, micro-USB cable, 4 x AA battery



- Accessories
- AA 1
 - 12 V Li-ion
 - 10.8 V Li-ion

GTC 600 C PROFESSIONAL

Advanced Visualisation of Temperature Differences with Smart Documentation



Technical Specifications	
Part number	0 601 083 508
Measuring range	-20 °C – +600 °C
Measuring accuracy	± 2.0 °C^ (0 to 100 °C)
No. of measuring points	49,152
Field of view (FOV)	45 x 35°
Power supply	12 V Li-ion / 10.8 V Li-ion
Weight	0.5 kg
Scope of delivery	Carrying bag, USB-C cable



- Accessories
- 12 V Li-ion
 - 10.8 V Li-ion

GTC 400 C PROFESSIONAL

Detailed Visualization of Temperature Differences



Technical Specifications	
Part number	0 601 083 150
Measuring range	-10 °C – +400 °C
Measuring accuracy	± 3.0 °C^ (0 to 100 °C)
No. of measuring points	19,200
Field of view (FOV)	53 x 43°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-ion / 10.8 V Li-ion
Weight	0.5 kg
Scope of delivery	Carrying bag, AA 1, hand strap, micro-USB cable, 4 x AA battery



- Accessories
- AA 1
 - 12 V Li-ion
 - 10.8 V Li-ion



iOS



Android





ROUGH CONDITIONS.
DETAILED IMAGES.

The tough and precise
GTC 600C Professional

6 YEARS

Tool & Battery Guarantee*

*With online registration



INSPECTION CAMERA

GIC 120 PROFESSIONAL

Compact for Quick and Easy Inspections



Technical Specifications	
Part number	0 601 241 100
Length of camera cable	120 cm
Display resolution	320 x 240 px
Display size	2.7 "
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	120 cm camera cable, hook, magnet, mirror, 4 x AA battery

GIC 120 C PROFESSIONAL

Efficient Inspection and Documentation of Hard-to-reach Areas



Technical Specifications	
Part number	0 601 241 2K0
Length of camera cable	120 cm
Display resolution	320 x 240 px
Display size	3.5 "
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-ion / 10.8 V Li-ion
Weight	0.6 kg
Scope of delivery	Carrying bag, AA 1, 120 cm camera cable, hook, magnet, mirror, 4GB microSD card, micro-USB cable, 4 x AA battery

Accessories

- AA 1
- 12 V Li-ion
- 10.8 V Li-ion

6 YEARS

Tool & Battery Guarantee*

*With online registration


WALLSCANNER

GMS 120 PROFESSIONAL

Simple and Intuitive – Logical Favourite for Locating Objects Effectively



Technical Specifications	
Part number	0 601 081 000
Max. detection depth	120 mm
Detection materials	metal, live cable, stud
Power supply	1 x 9 V 6LR61
Weight	0.3 kg
Scope of delivery	Pouch, hand strap, 1 x 9V battery

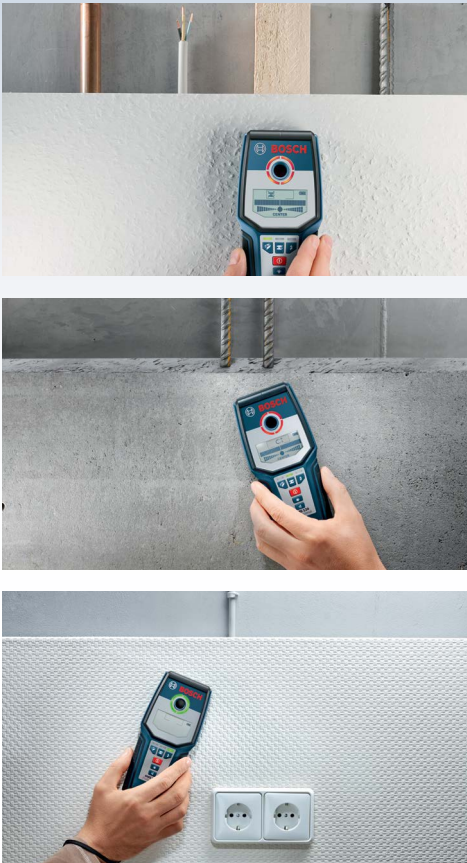

D-tect 120 PROFESSIONAL

Spot On All Common Objects



Technical Specifications	
Part number	0 601 081 3K0
Max. detection depth	120 mm
Detection materials	metal, cable, water-filled plastic pipe, stud
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-ion/ 10.8 V Li-ion
Weight	0.5 kg
Scope of delivery	Carrying bag, AA 1, 4 x AA battery



Accessories

- AA 1
- 12 V Li-ion
- 10.8 V Li-ion

D-tect 200 C PROFESSIONAL

Scan and Spot the Unseen – Top Performance and Easy Documentation



Technical Specifications	
Part number	0 601 081 6K0
Max. detection depth	200 mm
Detection materials	metal, cable, plastic pipe, stud
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-ion / 10.8 V Li-ion
Weight	0.6 kg
Scope of delivery	Carrying bag, AA 1, handstrap, USB-C cable, 4 x AA battery

- Accessories
- AA 1
 - 12 V Li-ion
 - 10.8 V Li-ion














NO GUESS.
NO SURPRISES.
Pinpoint hidden objects with the
wallscenner D-tect 200 C Professional.

ACCESSORIES PAGE










Laser Receiver / Remote Control		Part number	Working range	Accuracy	Power supply	Weight	Suitable for
	LR 1	0 601 015 4..	0 – 200 m	± 1 mm / ± 3 mm (fine / rough)	1 x 9 V 6LR61	0.3 kg	GRL 350 HV
	LR 1 G	0 601 069 7..	0 – 150 m	± 1 mm / ± 3 mm (fine / rough)	1 x 9 V 6LR61	0.3 kg	GRL 300 HVG
	LR 6	0 601 069 H..	5 – 50 m	± 1 mm / ± 3 mm (fine / rough)	2 x 1.5 V LR03 (AAA)	0.1 kg	GLL 5-50 X, GLL 3-80
	LR 7	0 601 069 J..	5 – 50 m	± 1 mm / ± 3 mm (fine / rough)	2 x 1.5 V LR6 (AA)	0.2 kg	GLL 5-50 X, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GCL 2-50 CG
	LR 30	1 617 S01 80J	up to 350 m	± 1.5 mm / ± 3 mm (fine / rough)	1 x 9 V 6LR61	0.3 kg	GRL 350 HV
	LR 45	0 601 069 L..	up to 300 m	± 1 mm/± 2 mm/ ± 3 mm/± 5 mm/ ± 7 mm/± 10 mm	2 x 1.5 V LR6 (AA)	0.3 kg	GRL 300 HVG, GRL 350 HV, GRL 400 H
	LR 60	0 601 069 P..	up to 300 m	± 0.5 mm/± 1 mm/ ± 2 mm/± 5 mm/ ± 10 mm	2 x 1.5 V LR6 (AA)	0.4 kg	GRL 600 CHV
	Receiver Mounting Bracket	1 608 M00 70F	nil.	nil.	nil.	0.1 kg	LR 1, LR 1 G
	Receiver Mounting Bracket	1 608 M00 C1L	nil.	nil.	nil.	0.1 kg	LR 6, LR 7
	RC 1	0 601 069 9..	up to 20 m	nil.	1 x 1.5 V LR6 (AA)	0.1 kg	GRL 300 HVG
	RC 2	0 601 069 C..	up to 20 m	nil.	1 x 1.5 V LR6 (AA)	0.1 kg	RM 3
	RC 4	1 600 A02 653	up to 30 m	nil.	2 x 1.5 V LR6 (AA)	0.1 kg	GRL 350 HV
	RC 6	1 619 PB4 755	up to 100 m	nil.	2 x 1.5 V LR6 (AA)	0.2 kg	GRL 600 CHV

ACCESSORIES PAGE

Tripod		Part number	Working range	Tripod thread	Section	Weight	Suitable for
	BT 150	0 601 096 B..	55 – 157 cm	1/4"	nil.	1.3 kg	GLM 400, GLM 500, GLM 50-23 G, GLM 50-27 CG, GLM 100-25 C, GLM 150-27 C, GLM 150 C, GPL 3 G, GPL 5 G, GCL 2-15 G, GCL 2-50 CG, GLL 1 P, GLL 30 G, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG
	BT 150-5/8"	0 601 096 C..	55 – 157 cm	5/8"	nil.	1.1 kg	GCL 2-15 G, GCL 2-50 CG, GLL 3-15 X, GLL 5-50 X, GLL 5-40 E, GLL 8-40 E, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG
	BT 170 HD	0 601 091 B..	107 – 165 cm	5/8"	nil.	5.5 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	BT 300 HD	0 601 091 A..	122 – 295 cm	5/8"	nil.	7.2 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	GR 240	0 601 094 1..	2.4 m	nil.	2	1.4 kg	GOL 26 D, GOL 32 D, GCL 2-50 CG, GLL 5-50 X, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	GR 500	0 601 094 3..	5.0 m	nil.	5	2.0 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV

Mount		Part number	Weight	Suitable for
	RM 2	0 601 092 7..	0.2 kg	GCL 2-15 G, GCL 2-50 CG
	RM 3	0 601 092 8..	0.5 kg	GCL 2-50 CG
	BM 1	0 601 015 A..	0.5 kg	GCL 2-15 G, GCL 2-50 CG, GLL 3-60 XG, GLL 3-80 , GLL 3-80 CG
	WM 4	0 601 092 4..	0.7 kg	GCL 2-50 CG, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GRL 300 HVG, GRL 350 HV, GRL 400 H
	WM 6	1 619 PB4 756	0.6 kg	GRL 600 CHV
	WM 24	2 601 A16 661	0.5 kg	GRL 350 HV

ACCESSORIES PAGE

Others		Part number	Weight	Suitable for
	GBA 12V 2.0 Ah	1 600 A00 F..	0.2 kg	GCL 2-50 CG, GLL 3-80 CG, GIS 1000 C, GTC 400 C, GTC 600 C, D-tect 120, D-tect 200 C, GIC 120 C
	BA 3.7V 1.0 Ah	1 608 M00 C..	0.1 kg	GLM 50-23 G, GLM 50-27 CG
	AA 1 Battery Adaptator	1 608 M00 C1B	0.1 kg	GCL 2-50 CG, GLL 3-80 CG, GIS 1000 C, GTC 400 C, D-tect 120, D-tect 200 C, GIC 120 C
	Laser Glasses Green	1 608 M00 05J	0.1 kg	All green laser products
	Laser Glasses Red	1 608 M00 05B	0.1 kg	All red laser products
	Target Plate Red	1 608 M00 05C	0.1 kg	All red laser products
	Measuring Plate	2 607 002 195	0.1 kg	All laser products
	Target Plate	2 607 001 391	0.1 kg	All laser products
	Pouch	2 609 160 194	0.1 kg	GLM 40

